

Your worldwide partner
for product and services



We pack responsibly

Offering unique experiences of innovation and service,
together with sustainability and social responsibility.

GOGLIO SPA
HEADQUARTERS
Via dell'Industria, 7 | 21020 Daverio (Varese) - Italy
Tel. +39 0332 940.111
MACHINE DIVISION
Via Parco Visconteo, 1 | 27010 Zeccone (Pavia) | Italy
www.goglio.it



LINES G14C G14CX

Vertical Form,
Fill & Seal, Multioption
starting from reel



Automatic packaging lines for
atmosphere packaging
with inert gas compensation.

Ideal for coffee beans and ground coffee,
flour, rice, products in chunks and powders,
pet food and detergents in powder.




INDUSTRY 4.0 - 4IR

fres-co
SYSTEM

HIGH SPEED
NEW
G14CX

LINES
G14C
G14CX

Vertical Form, Fill & Seal
Multioption starting from reel

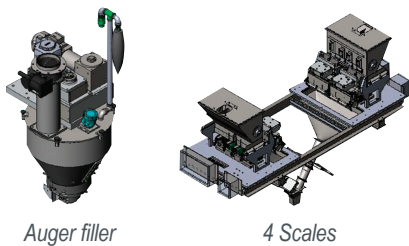

NEW G14CX

With motorized conveyor
and finishing groups,
to reach higher production speed.

Interconnection

Provided with Programmable Logic Controller (PLC) that allows the machine components to be connected to a Remote Monitoring System (MES/Goglio Cloud) and data exchange with all upstream and downstream packaging line process systems.

Machine layout and plus

Completely newly designed, they are characterized by an unparalleled ergonomics, safety and ease of maintenance, thanks to the Groups mounted man-high. The machine can be provided with two different Dosing Groups, assuring production flexibility and constant high packaging speed.

The dosing Groups are isolated in hermetic chambers suitable for atmosphere packaging with inert gas compensation, granting a better and extended product preservation. A double unwinder is also possible, with automatic joint system, for a fast reel change, reduced stops and higher efficiency.

Valves

The Goglio valve application station is fully integrated, mounted on tracks for total and easy extraction and maintenance. Different valve types can be applied (inner, thin, High Flow and Bio).




Materials


Wide range of heat-sealable transparent, paper coated, double wall, metallized, easy-open monomaterial and compostable laminates.

Finishing

A wide range of finished packages is possible: squared bottom gusset bag, with central back seal or 4 vertical seals, upper straight or half-moon flap, folded, with label or Tin-Tie reclosure. The Group for the 4 vertical seals can be easily deactivated, to turn production into central back seal without changing the forming tube.

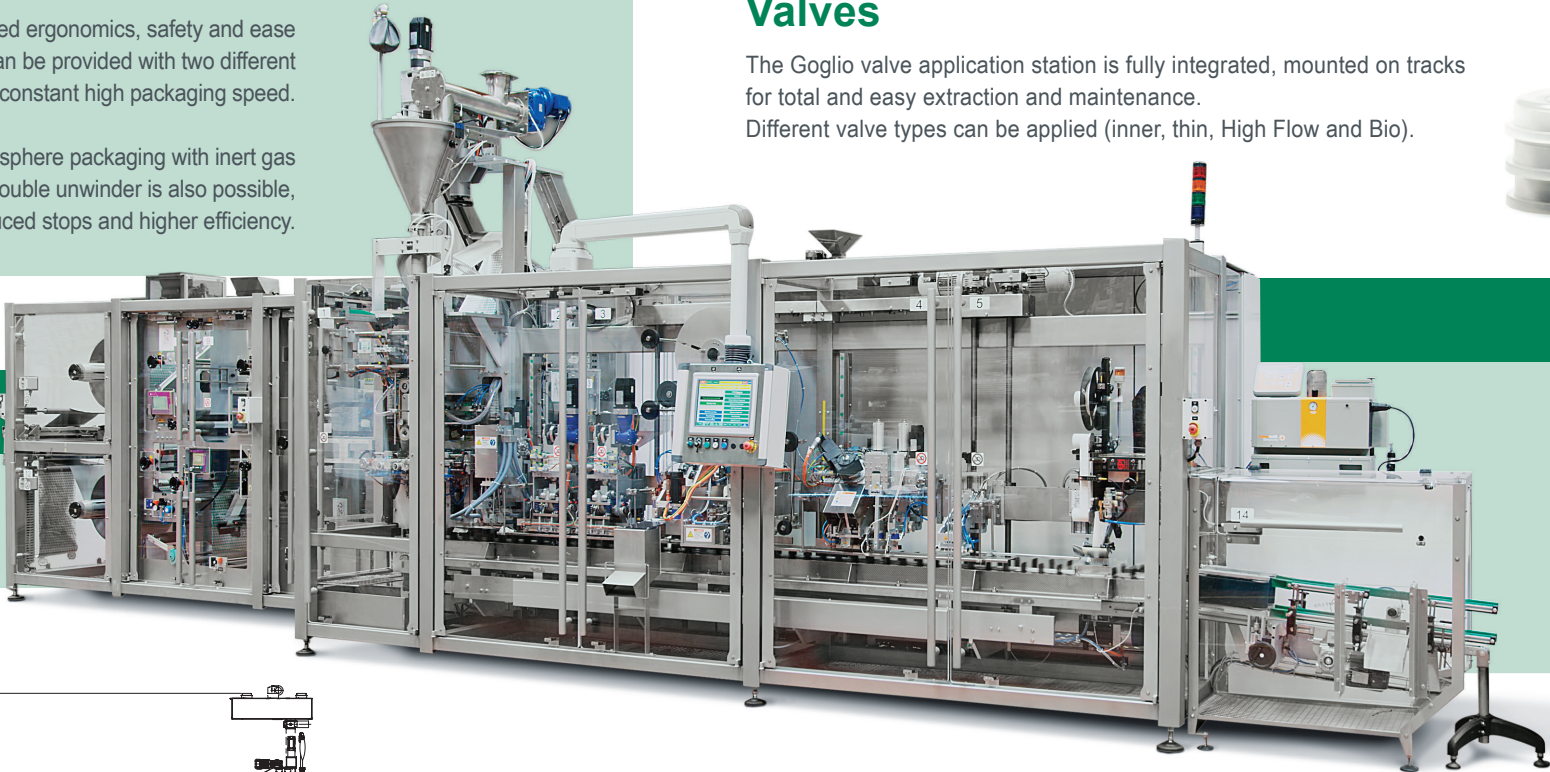

Different layouts are available, to be checked when ordering (in line, right/left L-shaped), they can fit in case of restricted spaces.

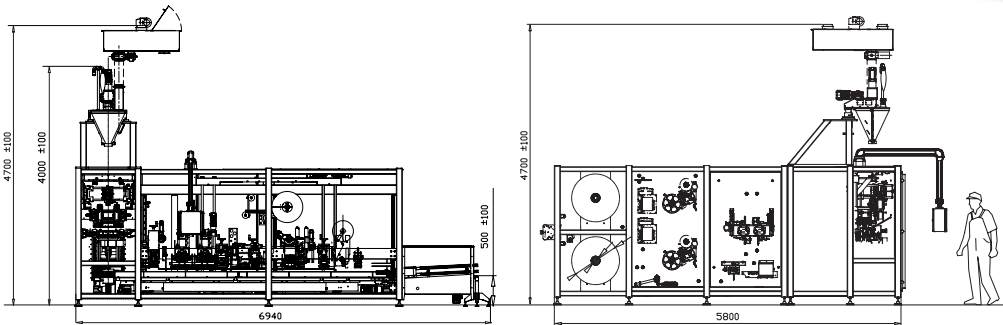

BAGS CHARACTERISTICS	G14C	G14CX
MINIMUM size (mm)	60 x 40 x 180	60 x 40 x 180
MAXIMUM SIZE (mm)	130 x 80 x 420	130 x 80 x 420
Max. option for central seal	150 x 85 x 450	150 x 85 x 450
Product height (mm)	60 - 300	60 - 300
Bag capacity (approximately g.)	125 - 1000	125 - 1000
Production: pieces per minute (up to)	65	85

Final data will be confirmed when ordering according to format, laminate composition and product to pack.



BAGS FINISHING	G14C	G14CX
Valve	•	•
4 vertical seals (Corner Sea™)	•	•
Front/side label	•	•
Half-moon upper flap	•	•
Easy-Open	•	•
Double fold of the flap	•	•
Reclosing label	•	•
Tin-Tie	•	•
NEW Motorized finishing groups		•